

DSIX4

## Decking Screw - Impreg®X4

*The DSIX4 decking screws are designed for treated wood. The screws have a 6 lobe recess to ensure good grip. The type 17 point drives the screw efficiently and prevents wood splitting.*

### Ominaisuudet

#### Features

- 6 lobe drive
- Countersunk with ribs
- Coarse thread
- Type 17 point
- Impreg® X4 coating

### Sovellus

#### Suitable for

- Decking to wood.




## DSIX4 Decking Screw - Impreg®X4

### Technical Data

Mitat ja ominaisarvot



Tuotenro	Tuotenumero	Mitat [mm]					
		d	l	d <sub>h</sub>	l <sub>g</sub>	t <sub>fix</sub>	Bit
DSIX44.2X35T-20	74361	4.2	35	7.3	20	15	T-20
DSIX44.2X45T-20	74362	4.2	45	7.3	23.5	21.5	T-20
DSIX44.2X55T-20	74363	4.2	55	7.3	27.5	27.5	T-20
DSIX44.2X55T-20 Bulk	74364	4.2	55	7.3	27.5	27.5	T-20
DSIX44.2X75T-20	74365	4.2	75	7.3	40.5	34.5	T-20
DSIX44.2X75T-20 Bulk	74366	4.2	75	7.3	40.5	34.5	T-20

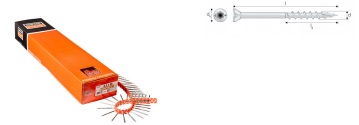

Collated Screws

Tuotenro	Tuotenumero	DB nr.	NOBB nr.	Mitat [mm]							Box Quantity
				d	l	d <sub>h</sub>	d <sub>1</sub>	l <sub>g</sub>	t <sub>fix</sub>	Bit	
DSIX44.2X45PH2	74294	-	53293656	4.2	45	7.3	2.5	23.5	21.5	PH2	1000
DSIX44.2X55PH2	74354	1949813	53293660	4.2	55	7.3	2.5	27.5	27.5	PH2	1000
DSIX44.2X75PH2	74355	1949814	53293675	4.2	75	7.3	2.7	40.5	34.5	PH2	400

Tuotteen ominaisuudet

Tuotenro	Taivutuslujuus - M <sub>y,k</sub> [Nmm]	Tyypillinen vetoparametri - f <sub>ax,k,90°</sub> [N/mm <sup>2</sup> ]	Tyypillinen läpivetoparametri - f <sub>head,k</sub> [N/mm <sup>2</sup> ]	Tyypillinen vetolujuus - f <sub>tens,k</sub> [kN]
DSIX44.2X35T-20	4295	13.9	14.4	6
DSIX44.2X45T-20	4295	13.9	14.4	6
DSIX44.2X55T-20	4295	13.9	14.4	6
DSIX44.2X55T-20 Bulk	4295	13.9	14.4	6
DSIX44.2X75T-20	4749	22.9	17.1	6
DSIX44.2X75T-20 Bulk	4749	22.9	17.1	6
DSIX44.2X45PH2	4295	13.9	14.4	6
DSIX44.2X55PH2	4295	13.9	14.4	6
DSIX44.2X75PH2	4749	22.9	17.1	6

